



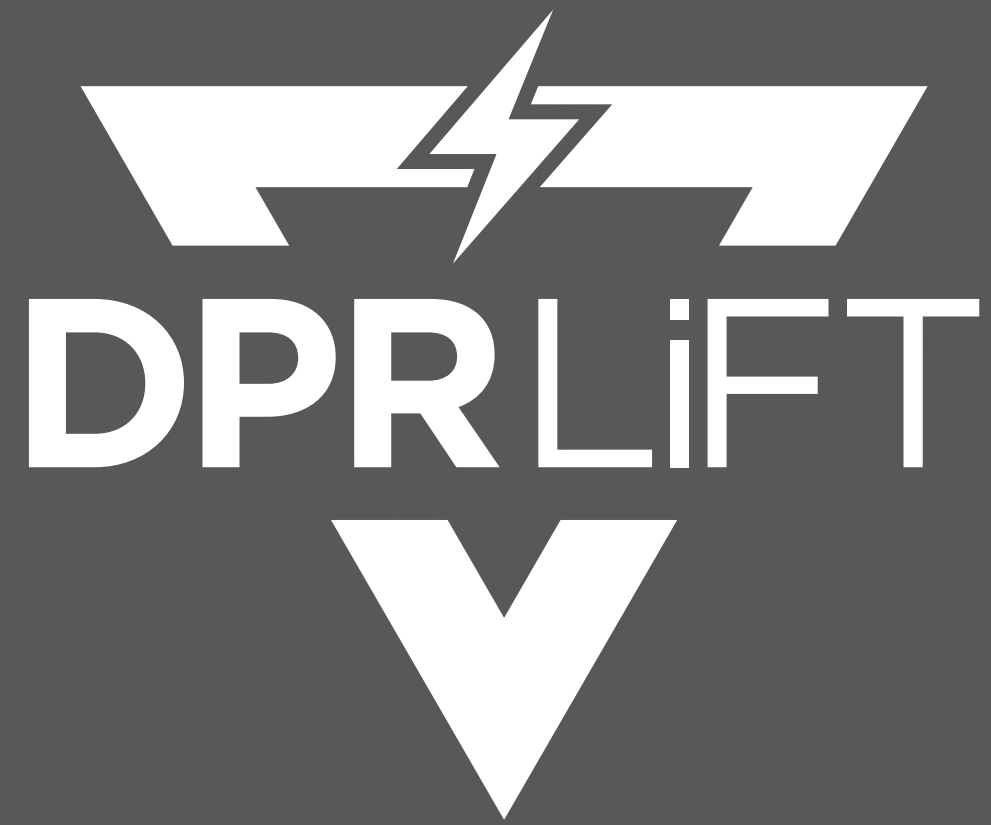

www.deparforklift.com.tr

Depar Forklift ve İstif Makinaları San. Tic. Ltd. Şti.

DPR LiFT C SERIES FORKLIFT TRUCKS

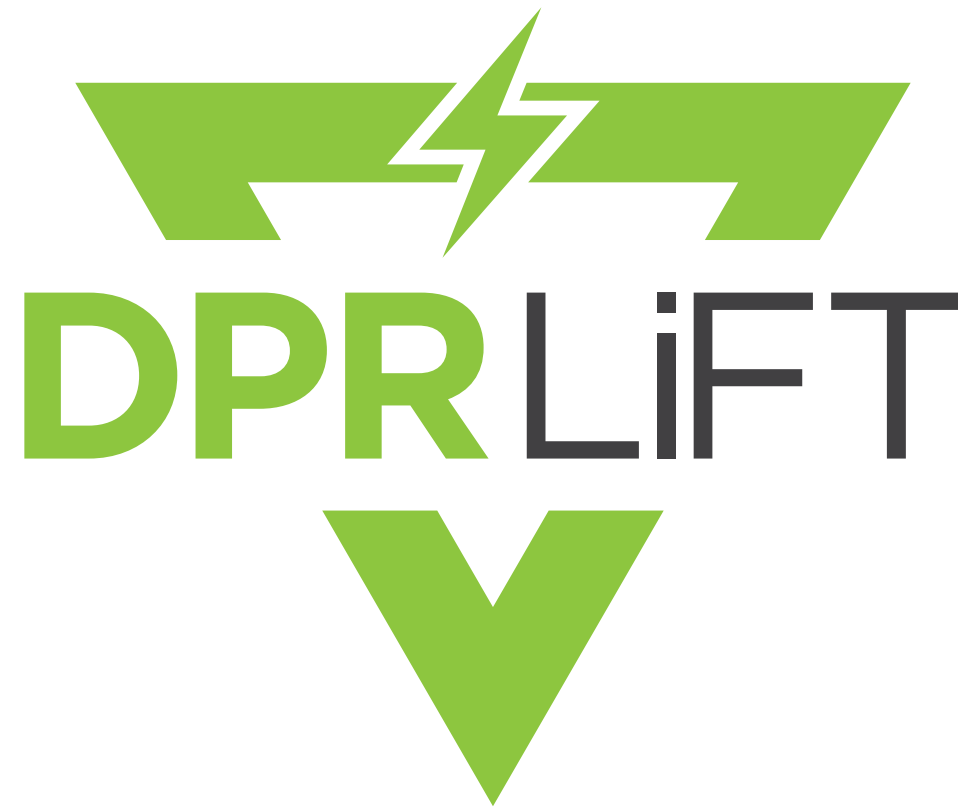

4.5 – 10 Ton C Series Diesel Forklift										
General	1	Model		CPCD45	Mini CPCD50	CPCD50	CPCD60	CPCD70	CPCD80	CPCD100
	2	Power		Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel
	3	Rated capacity	kg	4500	5000	5000	6000	7000	8000	10000
	4	Load center distance	mm	500	500	600	600	600	600	600
	5	Driving mode		Seat driving	Seat driving	Seat driving	Seat driving	Seat driving	Seat driving	Seat driving
Characteristic &Dimension	6	Fork length	mm	1070	1070	1220	1220	1220	1220	1220
	7	Overall length(Without fork)		3050	3139	3510	3560	3600	3600	4277
	8	Width		1400	1480	1970	1970	1970	1970	2245
	9	Closed mast height		2130	2270	2450	2450	2450	2450	2870
	10	Overhead guard height		2180	2280	2500	2500	2500	2500	2570
	11	Extended mast height		4190	4200	4600	4600	4600	4600	4293
	12	Wheelbase		1900	2000	2250	2250	2250	2250	2800
	13	Front overhang		560	570	600	600	600	600	718
	14	Front tread		1130	1180	1470	1470	1470	1470	1600
	15	Rear tread		1100	1190	1700	1700	1700	1700	1700
	16	Minimum ground clearance		150	200	230	230	230	230	250
	17	Lifting height		3000	3000	3000	3000	3000	3000	3000
	18	Free lifting height		150	150	210	210	210	210	210
	19	Minimum turning radius		2620	2800	3240	3300	3370	3370	3650
	20	Minimum right angle aisle width		2520	2550	5230	5310	5390	5390	5540
Performance	21	Mast tilt angle (front/rear)	(°)	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°
	22	Full-load maximum lifting speed		420	460	500	500	500	500	330
	23	Full-load maximum travel speed		22	22	24	24	24	24	20
	24	Gradeability(load)	%	20	20	15	15	15	15	15
Chassis	25	Operating weight	Kg	5860	7100	8200	8900	9600	10350	12410
	26	Tire no. (F/R)		2/2	2/2	4/2	4/2	4/2	4/2	4/2
	27	Tire type (F/R)		300-15/700-12	300-15/700-12	8.25-15/8.25-15	8.25-15/8.25-15	8.25-15/8.25-15	8.25-15/8.25-15	9.00-20/9.00-20
	28	Brake/service brake		Power brake-pedal	Power brake-pedal	Power brake-pedal	Power brake-pedal	Power brake-pedal	Power brake-pedal	Power brake-pedal
	29	Parking brake		Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Power& Transmission	30	Battery voltage/capacity	V/Ah	2-12/80	2-12/80	2-12/80	2-12/80	2-12/80	2-12/80	2-12/80
	31	Engine brand		Isuzu						
	32	Engine model		6BG1						
	33	Cylinder number		6						
	34	Displacement	L	6.494						
	35	Rated power/speed	Kw/rpm	82.4/2000						
	36	Rated torque/speed	Nm/rpm	416/1600						
	37	Gearbox gearshift number (F/R)		2/1			2/2			



DPRLIFT is a professional forklift manufacturers in China,Which are specialized in the manufacturing, sale, after sales service and R&D of construction and engineering machinery. Products have been approved by the ISO 9001:2015 and CE certificate, meet with the Europe and USA requirement. The advantage of our factory is to manufacture according to customer' s needs. We provide high cost-effective products and our products have been exported to Europe, America, Canada, Australia, the Middle East, Southeast Asia, Africa and many other countries and regions.

Details:



1, Multi-function dashboard 2, Reliable hydraulic system 3,Professional designed rubber shock absorber 4,Water proof connector



5, Comfortable operating space 6, Wide view mast 7, Frame type water tank 8,Reliable drive and steer axle

Workshop:



2-4 Ton C Series Diesel Forklift								
	Manufacturer	Runtx						
1	Model		CPCD20	CPCD25	CPCD30	CPCD35	CPCD38	CPCD40
2	Power		diesel	diesel	diesel	diesel	diesel	diesel
3	Rated lifting weight	KG	2000	2500	3000	3500	4000	4000
4	Load center distance	mm	500	500	500	500	500	500
5	Tire size (front)	mm	7.00-12-12PR	7.00-12-12PR	28x9-15	28x9-15	28x9-15	250-15
6	Tire size (rear)		6.00-9-10PR	6.00-9-10PR	6.50-10	6.50-10	6.50-10	6.50-10
7	Length without fork		2530	2580	2700	2800	2900	2900
8	Width		1150	1150	1220	1220	1220	1220
9	Overhead guard height		2070	2070	2122	2122	2122	2122
10	Wheelbase		1600	1600	1800	1800	1900	1900
11	Front/rear of overhang		477/440	477/440	485/515	485/515	485/550	485/550
12	Front/rear wheelbase		970/970	970/970	1210/1240	1210/1240	1210/1240	1210/1240
13	Minimum ground clearance		110	110	150	150	150	150
14	Standard lifting height without load		3000	3000	3000	3000	3000	3000
15	Adjustment range of fork	1024/200	1024/200	1060/250	1060/250	1060/250	1060/250	
16	Minimum turning radius (outside)	2170	2240	2470	2470	2550	2550	
17	Mast tilt (F/R)	(°)	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°
18	Fork length		1070	1070	1070	1070	1070	1070
19	Maximum hoisting speed unload/full load	mm/s	550/530	550/530	500/450	500/450	480/440	480/440
20	Maximum operating speed unload/full load	Km/h	19/19	19/19	19.5/18	19.5/18	19/18	19/18
21	Gradeability	%	≤20	≤20	≤20	≤20	≤20	≤20
22	Maximum traction (full load/unload)	KN	20/15	21/15	20/16	21/16	24/16	26/17
23	Operating weight	Kg	3320	3680	4350	4605	4850	4850
24	Engine brand		Isuzu					
25	Engine model		C240			4JG2		
26	Cylinder number		4			4		
27	Displacement	L	2.36			3.06		
28	Rated power/speed	Kw/rpm	35.4/2500			44.8/2450		
29	Rated torque/speed	Nm/rpm	137.7/1800			186/1800		
30	Emission standard		National III					
31	Gearbox gearshift number (F/R)		1-1 power shift					

2-4 Ton C Series Gasoline & LPG Forklift								
	Manufacturer	Runtx						
1	Model		CPQYD20	CPQYD25	CPQYD30	CPQYD35	CPQYD38	CPQYD40
2	Power		Gasoline & LPG	Gasoline & LPG	Gasoline & LPG	Gasoline & LPG	Gasoline & LPG	Gasoline & LPG
3	Rated lifting weight	KG	2000	2500	3000	3500	4000	4000
4	Load center distance	mm	500	500	500	500	500	500
5	Tire size (front)		7.00-12-12PR	7.00-12-12PR	28x9-15	28x9-15	28x9-15	250-15
6	Tire size (rear)		6.00-9-10PR	6.00-9-10PR	6.50-10	6.50-10	6.50-10	6.50-10
7	Length without fork		2530	2580	2700	2800	2900	2900
8	Width		1150	1150	1220	1220	1220	1220
9	Overhead guard height		2070	2070	2122	2122	2122	2122
10	Wheelbase		1600	1600	1800	1800	1900	1900
11	Front/rear of overhang		477/440	477/440	485/515	485/515	485/550	485/550
12	Front/rear wheelbase	mm	970/970	970/970	1210/1240	1210/1240	1210/1240	1210/1240
13	Minimum ground clearance		110	110	150	150	150	150
14	Standard lifting height without load		3000	3000	3000	3000	3000	3000
15	Adjustment range of fork		1024/200	1024/200	1060/250	1060/250	1060/250	1060/250
16	Minimum turning radius (outside)		2170	2240	2470	2470	2550	2550
17	Mast tilt (F/R)	(°)	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°
18	Fork length		1070	1070	1070	1070	1070	1070
19	Maximum hoisting speed unload/full load	mm/s	550/530	550/530	500/450	500/450	480/440	480/440
20	Maximum operating speed unload/full load	Km/h	19/19	19/19	19.5/18	19.5/18	19/18	19/18
21	Gradeability	%	≤20	≤20	≤20	≤20	≤20	≤20
22	Maximum traction (full load/unload)	KN	20/15	21/15	20/16	21/16	24/16	26/17
23	Operating weight	Kg	3320	3680	4350	4605	4850	4850
24	Engine brand		GCT Nissan					
25	Engine model		K25					
26	Cylinder number		4					
27	Displacement	L	2.49					
28	Rated power/speed	Kw/rpm	37.4/2300					
29	Rated torque/speed	Nm/rpm	176.5/1600					
30	Gearbox gearshift number (F/R)		1-1 power shift					

THE BEST FOR YOU!



Depar Forklift ve İstif Makinaları San. Tic. Ltd. Şti.

Orhanlı Mahallesi Demokrasi Caddesi No: 37/C 34956 Tuzla - İstanbul
Tel: +90 216 706 99 31 | Gsm: +90 538 220 20 00
WhatsApp Destek Hattı: +90 543 742 16 82
E-Posta: info@deparforklift.com.tr
Web: www.deparforklift.com.tr

